

PERFORMANCE CERTIFICATE: Residential (Part 1 of 5) **CF-1R**

Project Name <i>Carla Din & Doug Mosher</i>	Building Type <input checked="" type="checkbox"/> Single Family <input type="checkbox"/> Addition Alone <input type="checkbox"/> Multi Family <input checked="" type="checkbox"/> Existing+ Addition/Alteration	Date <i>9/17/2012</i>		
Project Address <i>9475 Skyline Dr. Oakland</i>	California Energy Climate Zone <i>CA Climate Zone 03</i>	Total Cond. Floor Area <i>2,000</i>	Addition <i>750</i>	# of Stories <i>2</i>

FIELD INSPECTION ENERGY CHECKLIST

Yes No HERS Measures -- If Yes, A CF-4R must be provided per Part 2 of 5 of this form.
 Yes No Special Features -- If Yes, see Part 2 of 5 of this form for details.

INSULATION		Area	Special	Status
Construction	Type	Cavity	Features (see Part 2 of 5)	
Floor	Wood Framed w/Crawl Space	R-19	1,250	Existing
Wall	Wood Framed	R-11	1,129	Existing
Door	Opaque Door	None	45	Existing
Roof	Wood Framed Attic	R-19	493	Existing
Wall	Wood Framed	R-21	891	New
Roof	Wood Framed Rafter	R-30	726	New
Floor	Wood Framed w/o Crawl Space	R-19	61	New

FENESTRATION		U-	Exterior				Status
Orientation	Area(ft ²)	Factor	SHGC	Overhang	Sidefins	Shades	
Front (E)	31.9	0.320	0.30	none	none	Bug Screen	New
Rear (W)	79.0	0.320	0.30	none	none	Bug Screen	Existing
Rear (W)	71.0	0.320	0.30	none	none	Bug Screen	New
Rear (W)	28.0	0.550	0.67	none	none	Bug Screen	Existing
Skylight	7.3	0.550	0.67	none	none	None	Existing
Right (N)	35.4	0.320	0.30	none	none	Bug Screen	New
Left (S)	48.0	0.320	0.30	none	none	Bug Screen	New
Skylight	8.0	0.550	0.67	none	none	None	New
Skylight	8.0	0.550	0.67	none	none	None	New
Skylight	8.0	0.550	0.67	none	none	None	New

HVAC SYSTEMS						
Qty.	Heating	Min. Eff	Cooling	Min. Eff	Thermostat	Status
1	Central Furnace	78% AFUE	No Cooling	13.0 SEER	Setback	Existing

HVAC DISTRIBUTION					Duct	Status
Location	Heating	Cooling	Duct Location	R-Value		
central furnace	Ducted	Ducted	CrawlSpace	0.0		Existing

WATER HEATING					
Qty.	Type	Gallons	Min. Eff	Distribution	Status

Project Name <i>Carla Din & Doug Mosher</i>	Building Type <input checked="" type="checkbox"/> Single Family <input type="checkbox"/> Addition Alone <input type="checkbox"/> Multi Family <input checked="" type="checkbox"/> Existing+ Addition/Alteration	Date <i>9/17/2012</i>
--	--	--------------------------

SPECIAL FEATURES INSPECTION CHECKLIST

The enforcement agency should pay special attention to the items specified in this checklist. These items require special written justification and documentation, and special verification to be used with the performance approach. The enforcement agency determines the adequacy of the justification, and may reject a building or design that otherwise complies based on the adequacy of the special justification and documentation submitted.

The HVAC System Standard vintage forced air. 78% No AC does not include a cooling system, field verification is not necessary.

HERS REQUIRED VERIFICATION

Items in this section require field testing and/or verification by a certified HERS Rater. The inspector must receive a completed CF-4R form for each of the measures listed below for final to be given.

PERFORMANCE CERTIFICATE: Residential (Part 3 of 5) **CF-1R**

Project Name <i>Carla Din & Doug Mosher</i>	Building Type <input checked="" type="checkbox"/> Single Family <input type="checkbox"/> Addition Alone <input type="checkbox"/> Multi Family <input checked="" type="checkbox"/> Existing+ Addition/Alteration	Date <i>9/17/2012</i>
--	--	--------------------------

ANNUAL ENERGY USE SUMMARY

TDV (kBtu/ft ² -yr)	Standard	Proposed	Margin
Space Heating	36.12	34.47	1.64
Space Cooling	7.93	5.48	2.46
Fans	6.52	5.73	0.79
Domestic Hot Water	18.27	18.27	0.00
Pumps	0.00	0.00	0.00
Totals	68.85	63.96	4.89
Percent Better Than Standard:			7.1 %

BUILDING COMPLIES - NO HERS VERIFICATION REQUIRED

Building Front Orientation:	(E) 90 deg	Ext. Walls/Roof	Wall Area	Fenestration Area
Number of Dwelling Units:	1.00	(E)	627	32
Fuel Available at Site:	Natural Gas	(S)	276	48
Raised Floor Area:	1,311	(W)	903	178
Slab on Grade Area:	0	(N)	552	35
Average Ceiling Height:	8.0	Roof	1,250	31
Fenestration Average U-Factor:	0.34		TOTAL:	325
Average SHGC:	0.34		Fenestration/CFA Ratio:	16.2 %

REMARKS

STATEMENT OF COMPLIANCE

This certificate of compliance lists the building features and specifications needed to comply with Title 24, Parts 1 the Administrative Regulations and Part 6 the Efficiency Standards of the California Code of Regulations.

The documentation author hereby certifies that the documentation is accurate and complete.

Documentation Author

Company <i>Peralta Energy/Smart Builders</i>		<i>9/17/2012</i>
Address	Name	
City/State/Zip	Phone	Signed Date

The individual with overall design responsibility hereby certifies that the proposed building design represented in this set of construction documents is consistent with the other compliance forms and worksheets, with the specifications, and with any other calculations submitted with this permit application, and recognizes that compliance using duct design, duct sealing, verification of refrigerant charge, insulation installation quality, and building envelope sealing require installer testing and certification and field verification by an approved HERS rater.

Designer or Owner (per Business & Professions Code)

Company <i>Andrew Lee Architecture</i>		
Address <i>5865 Doyle St., Studio B</i>	Name <i>Andrew Lee</i>	
City/State/Zip <i>Emeryville, CA 94608</i>	Phone <i>510.967.9724</i>	Signed License # Date

CERTIFICATE OF COMPLIANCE: Residential (Part 4 of 5) **CF-1R**

Project Name: **Carla Din & Doug Mosher** Building Type: Single Family Addition Alone Multi Family Existing+ Addition/Alteration Date: **9/17/2012**

OPAQUE SURFACE DETAILS

Surface Type	Area	U-Factor	Insulation				Azimuth	Tilt	Status	Joint Appendix 4	Location/Comments
			Cavity	Exterior	Frame	Interior					
Floor	1,250	0.037	R-19				0	180	Existing	4.4.1-A4	Existing downstairs
Wall	327	0.110	R-11				90	90	Existing	4.3.1-A2	Existing downstairs
Door	25	0.500	None				90	90	Existing	4.5.1-A4	Existing downstairs
Door	20	0.500	None				90	90	Existing	4.5.1-A4	Existing downstairs
Wall	276	0.110	R-11				0	90	Existing	4.3.1-A2	Existing downstairs
Wall	232	0.110	R-11				270	90	Existing	4.3.1-A2	Existing downstairs
Wall	294	0.110	R-11				270	90	Existing	4.3.1-A2	Existing downstairs
Roof	493	0.048	R-19				180	0	Existing	4.2.1-A16	Existing downstairs
Wall	199	0.066	R-21				270	90	New	4.3.1-A24	New upstairs area
Wall	223	0.066	R-21				90	90	New	4.3.1-A24	New upstairs area
Wall	241	0.066	R-21				0	90	New	4.3.1-A24	New upstairs area
Wall	228	0.066	R-21				180	90	New	4.3.1-A24	New upstairs area
Roof	726	0.035	R-30				0	0	New	4.2.2-A17	New upstairs area
Floor	61	0.048	R-19				0	180	New	4.4.2-A4	New upstairs area

FENESTRATION SURFACE DETAILS

ID	Type	Area	U-Factor ¹	SHGC ²	Azm	Status	Glazing Type	Location/Comments
1	Window	13.3	0.320 NFRC	0.30 NFRC	90	New	Double Non Metal Clear Operab	Existing downstairs
2	Window	44.0	0.320 NFRC	0.30 NFRC	270	Existing	Double Non Metal Clear Operab	Existing downstairs
3	Window	14.0	0.320 NFRC	0.30 NFRC	270	New	Double Non Metal Clear Operab	Existing downstairs
4	Window	14.0	0.320 NFRC	0.30 NFRC	270	New	Double Non Metal Clear Operab	Existing downstairs
5	Window	28.0	0.550 Default	0.67 Default	270	Existing	Double Non Metal Clear Picture	Existing downstairs
6	Window	35.0	0.320 NFRC	0.30 NFRC	270	Existing	Double Non Metal Clear Operab	Existing downstairs
7	Skylight	7.3	0.550 Default	0.67 Default	180	Existing	Double Non Metal Clear Picture	Existing downstairs
8	Window	24.0	0.320 NFRC	0.30 NFRC	270	New	Double Non Metal Clear Operab	New upstairs area
9	Window	19.0	0.320 NFRC	0.30 NFRC	270	New	Double Non Metal Clear Operab	New upstairs area
10	Window	5.3	0.320 NFRC	0.30 NFRC	90	New	Double Non Metal Clear Operab	New upstairs area
11	Window	5.3	0.320 NFRC	0.30 NFRC	90	New	Double Non Metal Clear Operab	New upstairs area
12	Window	8.0	0.320 NFRC	0.30 NFRC	90	New	Double Non Metal Clear Operab	New upstairs area
13	Window	12.0	0.320 NFRC	0.30 NFRC	0	New	Double Non Metal Clear Operab	New upstairs area
14	Window	10.0	0.320 NFRC	0.30 NFRC	0	New	Double Non Metal Clear Operab	New upstairs area
15	Window	6.7	0.320 NFRC	0.30 NFRC	0	New	Double Non Metal Clear Operab	New upstairs area
16	Window	6.7	0.320 NFRC	0.30 NFRC	0	New	Double Non Metal Clear Operab	New upstairs area

(1) U-Factor Type: 116-A = Default Table from Standards, NFRC = Labeled Value
 (2) SHGC Type: 116-B = Default Table from Standards, NFRC = Labeled Value

EXTERIOR SHADING DETAILS

ID	Exterior Shade Type	SHGC	Window		Overhang			Left Fin			Right Fin			
			Hgt	Wd	Len	Hgt	LExt	RExt	Dist	Len	Hgt	Dist	Len	Hgt
1	Bug Screen	0.76												
2	Bug Screen	0.76												
3	Bug Screen	0.76												
4	Bug Screen	0.76												
5	Bug Screen	0.76												
6	Bug Screen	0.76												
7	None	1.00												
8	Bug Screen	0.76												
9	Bug Screen	0.76												
10	Bug Screen	0.76												
11	Bug Screen	0.76												
12	Bug Screen	0.76												
13	Bug Screen	0.76												
14	Bug Screen	0.76												
15	Bug Screen	0.76												
16	Bug Screen	0.76												

CERTIFICATE OF COMPLIANCE: Residential (Part 4 of 5) **CF-1R**

Project Name: *Carla Din & Doug Mosher* Building Type: Single Family Addition Alone Multi Family Existing+ Addition/Alteration Date: *9/17/2012*

OPAQUE SURFACE DETAILS

Surface Type	Area	U-Factor	Insulation				Azimuth	Tilt	Status	Joint Appendix 4	Location/Comments
			Cavity	Exterior	Frame	Interior					

FENESTRATION SURFACE DETAILS

ID	Type	Area	U-Factor ¹		SHGC ²		Azm	Status	Glazing Type	Location/Comments
17	Window	24.0	0.320	NFRC	0.30	NFRC	180	New	Double Non Metal Clear Operab	New upstairs area
18	Window	24.0	0.320	NFRC	0.30	NFRC	180	New	Double Non Metal Clear Operab	New upstairs area
19	Skylight	8.0	0.550	Default	0.67	Default	0	New	Double Non Metal Clear Picture	New upstairs area
20	Skylight	8.0	0.550	Default	0.67	Default	0	New	Double Non Metal Clear Picture	New upstairs area
21	Skylight	8.0	0.550	Default	0.67	Default	0	New	Double Non Metal Clear Picture	New upstairs area

(1) U-Factor Type: 116-A = Default Table from Standards, NFRC = Labeled Value
 (2) SHGC Type: 116-B = Default Table from Standards, NFRC = Labeled Value

EXTERIOR SHADING DETAILS

ID	Exterior Shade Type	SHGC	Window		Overhang			Left Fin			Right Fin				
			Hgt	Wd	Len	Hgt	LExt	RExt	Dist	Len	Hgt	Dist	Len	Hgt	
17	Bug Screen	0.76													
18	Bug Screen	0.76													
19	None	1.00													
20	None	1.00													
21	None	1.00													

MANDATORY MEASURES SUMMARY: Residential

(Page 1 of 3)

MF-1R

Project Name

Carla Din & Doug Mosher

Date

9/17/2012

NOTE: Low-rise residential buildings subject to the Standards must comply with all applicable mandatory measures listed, regardless of the compliance approach used. More stringent energy measures listed on the Certificate of Compliance (CF-1R, CF-1R-ADD, or CF-1R-ALT Form) shall supersede the items marked with an asterisk (*) below. This Mandatory Measures Summary shall be incorporated into the permit documents, and the applicable features shall be considered by all parties as minimum component performance specifications whether they are shown elsewhere in the documents or in this summary. Submit all applicable sections of the MF-1R Form with plans.

Building Envelope Measures:

§116(a)1: Doors and windows between conditioned and unconditioned spaces are manufactured to limit air leakage.

§116(a)4: Fenestration products (except field-fabricated windows) have a label listing the certified U-Factor, certified Solar Heat Gain Coefficient (SHGC), and infiltration that meets the requirements of §10-111(a).

§117: Exterior doors and windows are weather-stripped; all joints and penetrations are caulked and sealed.

§118(a): Insulation specified or installed meets Standards for Insulating Material. Indicate type and include on CF-6R Form.

§118(i): The thermal emittance and solar reflectance values of the cool roofing material meets the requirements of §118(i) when the installation of a Cool Roof is specified on the CF-1R Form.

*§150(a): Minimum R-19 insulation in wood-frame ceiling or equivalent U-factor.

§150(b): Loose fill insulation shall conform with manufacturer's installed design labeled R-Value.

*§150(c): Minimum R-13 insulation in wood-frame wall or equivalent U-factor.

*§150(d): Minimum R-13 insulation in raised wood-frame floor or equivalent U-factor.

§150(f): Air retarding wrap is tested, labeled, and installed according to ASTM E1677-95(2000) when specified on the CF-1R Form.

§150(g): Mandatory Vapor barrier installed in Climate Zones 14 or 16.

§150(l): Water absorption rate for slab edge insulation material alone without facings is no greater than 0.3%; water vapor permeance rate is no greater than 2.0 perm/inch and shall be protected from physical damage and UV light deterioration.

Fireplaces, Decorative Gas Appliances and Gas Log Measures:

§150(e)1A: Masonry or factory-built fireplaces have a closable metal or glass door covering the entire opening of the firebox.

§150(e)1B: Masonry or factory-built fireplaces have a combustion outside air intake, which is at least six square inches in area and is equipped with a with a readily accessible, operable, and tight-fitting damper and or a combustion-air control device.

§150(e)2: Continuous burning pilot lights and the use of indoor air for cooling a firebox jacket, when that indoor air is vented to the outside of the building, are prohibited.

Space Conditioning, Water Heating and Plumbing System Measures:

§110-§113: HVAC equipment, water heaters, showerheads, faucets and all other regulated appliances are certified by the Energy Commission.

§113(c)5: Water heating recirculation loops serving multiple dwelling units and High-Rise residential occupancies meet the air release valve, backflow prevention, pump isolation valve, and recirculation loop connection requirements of §113(c)5.

§115: Continuously burning pilot lights are prohibited for natural gas: fan-type central furnaces, household cooking appliances (appliances with an electrical supply voltage connection with pilot lights that consume less than 150 Btu/hr are exempt), and pool and spa heaters.

§150(h): Heating and/or cooling loads are calculated in accordance with ASHRAE, SMACNA or ACCA.

§150(i): Heating systems are equipped with thermostats that meet the setback requirements of Section 112(c).

§150(j)1A: Storage gas water heaters rated with an Energy Factor no greater than the federal minimal standard are externally wrapped with insulation having an installed thermal resistance of R-12 or greater.

§150(j)1B: Unfired storage tanks, such as storage tanks or backup tanks for solar water-heating system, or other indirect hot water tanks have R-12 external insulation or R-16 internal insulation where the internal insulation R-value is indicated on the exterior of the tank.

§150(j)2: First 5 feet of hot and cold water pipes closest to water heater tank, non-recirculating systems, and entire length of recirculating sections of hot water pipes are insulated per Standards Table 150-B.

§150(j)2: Cooling system piping (suction, chilled water, or brine lines), and piping insulated between heating source and indirect hot water tank shall be insulated to Table 150-B and Equation 150-A.

§150(j)2: Pipe insulation for steam hydronic heating systems or hot water systems >15 psi, meets the requirements of Standards Table 123-A.

§150(j)3A: Insulation is protected from damage, including that due to sunlight, moisture, equipment maintenance, and wind.

§150(j)3A: Insulation for chilled water piping and refrigerant suction lines includes a vapor retardant or is enclosed entirely in conditioned space.

§150(j)4: Solar water-heating systems and/or collectors are certified by the Solar Rating and Certification Corporation.

Project Name

Carla Din & Doug Mosher

Date

9/17/2012

§150(m)1: All air-distribution system ducts and plenums installed, are sealed and insulated to meet the requirements of CMC Sections 601, 602, 603, 604, 605 and Standard 6-5; supply-air and return-air ducts and plenums are insulated to a minimum installed level of R-4.2 or enclosed entirely in conditioned space. Openings shall be sealed with mastic, tape or other duct-closure system that meets the applicable requirements of UL 181, UL 181A, or UL 181B or aerosol sealant that meets the requirements of UL 723. If mastic or tape is used to seal openings greater than 1/4 inch, the combination of mastic and either mesh or tape shall be used

§150(m)1: Building cavities, support platforms for air handlers, and plenums defined or constructed with materials other than sealed sheet metal, duct board or flexible duct shall not be used for conveying conditioned air. Building cavities and support platforms may contain ducts. Ducts installed in cavities and support platforms shall not be compressed to cause reductions in the cross-sectional area of the ducts.

§150(m)2D: Joints and seams of duct systems and their components shall not be sealed with cloth back rubber adhesive duct tapes unless such tape is used in combination with mastic and draw bands.

§150(m)7: Exhaust fan systems have back draft or automatic dampers.

§150(m)8: Gravity ventilating systems serving conditioned space have either automatic or readily accessible, manually operated dampers.

§150(m)9: Insulation shall be protected from damage, including that due to sunlight, moisture, equipment maintenance, and wind. Cellular foam insulation shall be protected as above or painted with a coating that is water retardant and provides shielding from solar radiation that can cause degradation of the material.

§150(m)10: Flexible ducts cannot have porous inner cores.

§150(o): All dwelling units shall meet the requirements of ANSI/ASHRAE Standard 62.2-2007 Ventilation and Acceptable Indoor Air Quality in Low-Rise Residential Buildings. Window operation is not a permissible method of providing the Whole Building Ventilation required in Section 4 of that Standard.

Pool and Spa Heating Systems and Equipment Measures:

§114(a): Any pool or spa heating system shall be certified to have: a thermal efficiency that complies with the Appliance Efficiency Regulations; an on-off switch mounted outside of the heater; a permanent weatherproof plate or card with operating instructions; and shall not use electric resistance heating or a pilot light.

§114(b)1: Any pool or spa heating equipment shall be installed with at least 36" of pipe between filter and heater, or dedicated suction and return lines, or built-up connections for future solar heating.

§114(b)2: Outdoor pools or spas that have a heat pump or gas heater shall have a cover.

§114(b)3: Pools shall have directional inlets that adequately mix the pool water, and a time switch that will allow all pumps to be set or programmed to run only during off-peak electric demand periods.

§150(p): Residential pool systems or equipment meet the pump sizing, flow rate, piping, filters, and valve requirements of §150(p).

Residential Lighting Measures:

§150(k)1: High efficacy luminaires or LED Light Engine with Integral Heat Sink has an efficacy that is no lower than the efficacies contained in Table 150-C and is not a low efficacy luminaire as specified by §150(k)2.

§150(k)3: The wattage of permanently installed luminaires shall be determined as specified by §130(d).

§150(k)4: Ballasts for fluorescent lamps rated 13 Watts or greater shall be electronic and shall have an output frequency no less than 20 kHz.

§150(k)5: Permanently installed night lights and night lights integral to a permanently installed luminaire or exhaust fan shall contain only high efficacy lamps meeting the minimum efficacies contained in Table 150-C and shall not contain a line-voltage socket or line-voltage lamp holder; OR shall be rated to consume no more than five watts of power as determined by §130(d), and shall not contain a medium screw-base socket.

§150(k)6: Lighting integral to exhaust fans, in rooms other than kitchens, shall meet the applicable requirements of §150(k).

§150(k)7: All switching devices and controls shall meet the requirements of §150(k)7.

§150(k)8: A minimum of 50 percent of the total rated wattage of permanently installed lighting in kitchens shall be high efficacy. EXCEPTION: Up to 50 watts for dwelling units less than or equal to 2,500 ft² or 100 watts for dwelling units larger than 2,500 ft² may be exempt from the 50% high efficacy requirement when: all low efficacy luminaires in the kitchen are controlled by a manual on occupant sensor, dimmer, energy management system (EMCS), or a multi-scene programmable control system; and all permanently installed luminaries in garages, laundry rooms, closets greater than 70 square feet, and utility rooms are high efficacy and controlled by a manual-on occupant sensor.

§150(k)9: Permanently installed lighting that is internal to cabinets shall use no more than 20 watts of power per linear foot of illuminated cabinet.

Project Name

Carla Din & Doug Mosher

Date

9/17/2012

§150(k)10: Permanently installed luminaires in bathrooms, attached and detached garages, laundry rooms, closets and utility rooms shall be high efficacy.

EXCEPTION 1: Permanently installed low efficacy luminaires shall be allowed provided that they are controlled by a manual-on occupant sensor certified to comply with the applicable requirements of §119.

EXCEPTION 2: Permanently installed low efficacy luminaires in closets less than 70 square feet are not required to be controlled by a manual-on occupancy sensor.

§150(k)11: Permanently installed luminaires located in rooms or areas other than in kitchens, bathrooms, garages, laundry rooms, closets, and utility rooms shall be high efficacy luminares. EXCEPTION 1: Permanently installed low efficacy luminaires shall be allowed provided they are controlled by either a dimmer switch that complies with the applicable requirements of §119, or by a manual-on occupant sensor that complies with the applicable requirements of §119. EXCEPTION 2: Lighting in detached storage building less than 1000 square feet located on a residential site is not required to comply with §150(k)11.

§150(k)12: Luminaires recessed into insulated ceilings shall be listed for zero clearance insulation contact (IC) by Underwriters Laboratories or other nationally recognized testing/rating laboratory; and have a label that certifies the luminaire is airtight with air leakage less than 2.0 CFM at 75 Pascals when tested in accordance with ASTM E283; and be sealed with a gasket or caulk between the luminaire housing and ceiling.

§150(k)13: Luminaires providing outdoor lighting, including lighting for private patios in low-rise residential buildings with four or more dwelling units, entrances, balconies, and porches, which are permanently mounted to a residential building or to other buildings on the same lot shall be high efficacy. EXCEPTION 1: Permanently installed outdoor low efficacy luminaires shall be allowed provided that they are controlled by a manual on/off switch, a motion sensor not having an override or bypass switch that disables the motion sensor, and one of the following controls: a photocontrol not having an override or bypass switch that disables the photocontrol; OR an astronomical time clock not having an override or bypass switch that disables the astronomical time clock; OR an energy management control system (EMCS) not having an override or bypass switch that allows the luminaire to be always on. EXCEPTION 2: Outdoor luminaires used to comply with Exception1 to §150(k)13 may be controlled by a temporary override switch which bypasses the motion sensing function provided that the motion sensor is automatically reactivated within six hours. EXCEPTION 3: Permanently installed luminaires in or around swimming pool, water features, or other location subject to Article 680 of the California Electric Code need not be high efficacy luminaires.

§150(k)14: Internally illuminated address signs shall comply with Section 148; OR not contain a screw-base socket, and consume no more than five watts of power as determined according to §130(d).

§150(k)15: Lighting for parking lots and carports with a total of for 8 or more vehicles per site shall comply with the applicable requirements in Sections 130, 132, 134, and 147. Lighting for parking garages for 8 or more vehicles shall comply with the applicable requirements of Sections 130, 131, 134, and 146.

§150(k)16: Permanently installed lighting in the enclosed, non-dwelling spaces of low-rise residential buildings with four or more dwelling units shall be high efficacy luminaires. EXCEPTION: Permanently installed low efficacy luminaires shall be allowed provided that they are controlled by an occupant sensor(s) certified to comply with the applicable requirements of §119.


HVAC SYSTEM HEATING AND COOLING LOADS SUMMARY

Project Name Carla Din & Doug Mosher	Date 9/17/2012
System Name central furnace	Floor Area 2,000

ENGINEERING CHECKS		SYSTEM LOAD					
Number of Systems	1	Total Room Loads Return Vented Lighting Return Air Ducts Return Fan Ventilation Supply Fan Supply Air Ducts TOTAL SYSTEM LOAD	COIL COOLING PEAK			COIL HTG. PEAK	
Heating System			CFM	Sensible	Latent	CFM	Sensible
Output per System	64,000		10,521	21,614	394	780	23,229
Total Output (Btuh)	64,000			0			
Output (Btuh/sqft)	32.0			2,484			4,856
Cooling System				0			0
Output per System	0		0	0	0	0	0
Total Output (Btuh)	0			2,094			-2,094
Total Output (Tons)	0.0			2,484			4,856
Total Output (Btuh/sqft)	0.0						
Total Output (sqft/Ton)	0.0						

Air System		HVAC EQUIPMENT SELECTION				
CFM per System	800	Standard vintage forced air. 78% No AC	0	0		64,000
Airflow (cfm)	800					
Airflow (cfm/sqft)	0.40					
Airflow (cfm/Ton)	0.0					
Outside Air (%)	0.0 %	Total Adjusted System Output (Adjusted for Peak Design conditions)	0	0		64,000
Outside Air (cfm/sqft)	0.00					
Note: values above given at ARI conditions		TIME OF SYSTEM PEAK			Aug 3 PM	Jan 1 AM

HEATING SYSTEM PSYCHROMETRICS (Airstream Temperatures at Time of Heating Peak)

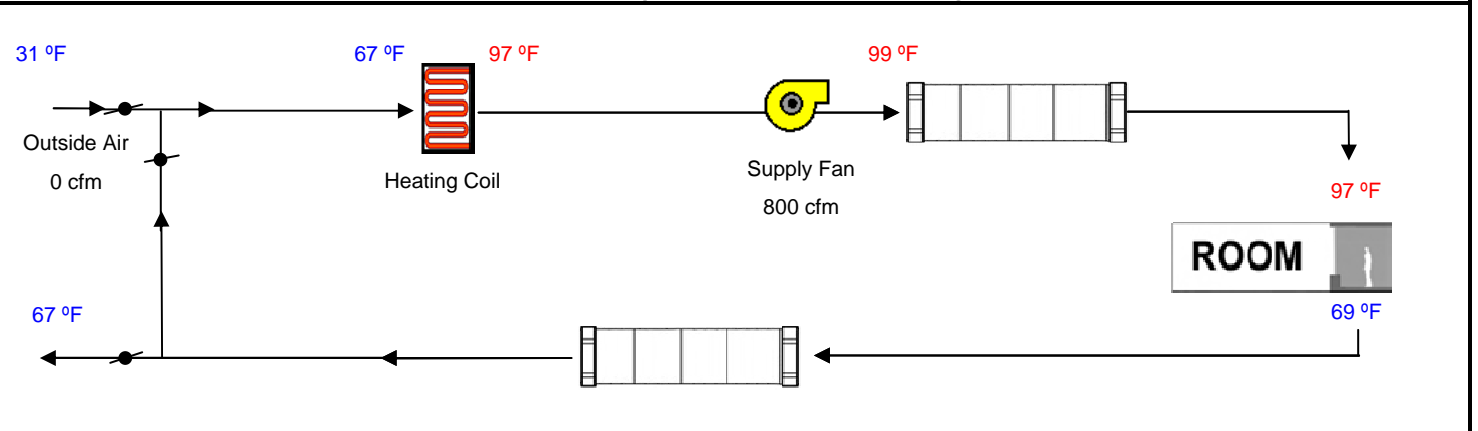

COOLING SYSTEM PSYCHROMETRICS (Airstream Temperatures at Time of Cooling Peak)

